

# 2025 ChemE Cube Safety Program

### 1.0 Program Overview

The objective of the ChemE Cube Safety Program is to ensure safety is considered during all phases of the competition, including prototype development (construction and testing) and the competition. The safety program consists of a compliance audit and competition safety rules. A review of the product design and a compliance evaluation will be conducted from the documentation provided by competing teams, and an onsite audit of the product by safety professionals.

### 2.0 Experimentation and Building of Cube

Teams should follow their university safety guidelines regarding lab usage, chemical handling, storage and disposal practices, PPE usage, 3D printing, machine shop, use of fabrication tools, and all other labs.

### 3.0 Safety Review Process

Teams will design a cube that can capture carbon dioxide (CO<sub>2</sub>) using a direct air capture (DAC) technique in alignment with the 2025 ChemE Cube Problem Statement. Teams will develop a working prototype of their design and describe the design in a document called an Engineering Documentation Package (EDP). The EDP contains information about the design, and includes a description of the process, technical data, chemical information, and information on hazards and safeguards.

Teams will be required to consider safety as they conceptualize the design. They will also be required to complete safety training prior to working in the lab or with a 3D printer, if applicable, or other fabrication tools to develop a prototype. When the team has completed a prototype (i.e., the cube mini-plant hardware that will be used in the competition) and an EDP (signed by a supervising faculty member), a team of safety professionals will review the design and conduct two compliance audits (online and onsite). Safety professionals will assess the design and the physical prototype for hazards, ensure that these hazards have been mitigated to the extent possible, and that adequate safeguards are present to protect participants and audience members during operation of the prototype on competition day.

The safety review process steps (for safety professionals):



- 1. Review the EDP documentation.
- 2. Complete the EDP Review form.
- 3. Return EDP Review forms to teams via RAPID staff to allow product revisions as needed.
- 4. Complete an onsite safety assessment of the prototype and EDP.
- 5. Attest by signature that each prototype is compliant with the safety rules for the competition, which permit teams to compete.

### 4.0 Compliance Audit

A preliminary compliance audit of the cube design will occur as part of the Virtual Qualifying Presentation presented by teams in order to qualify for the ChemE Cube Competition. Teams will be required to present at least one slide as part of their presentation which describes potential hazards associated with their design which demonstrates that teams have adequately anticipated and mitigated safety risks and hazards in their cube design. Safety considerations should include, but are not limited to:

- Potential loss of containment
- Waste considerations
- Chemical compatibility
- Expected side reactions or hazardous materials generated
- Potential risk to human health
- Control mechanisms
- Safety considerations with scale-up or number-up
- Personal protective equipment

Note: should any major safety concerns be flagged during the preliminary compliance audit, your team may be required to complete a more comprehensive safety review (in the form of a Zoom meeting) by the RAPID team and require a faculty signature before commencing on the build portion of the competition.

A compliance audit of the physical cube prototype will occur in two stages:

- ~1 month prior to the competition: Online evaluation where teams will submit an Engineering Documentation Package (EDP) electronically and receive feedback. A RAPID staff member will communicate EDP instructions to all teams. Failure to meet the posted deadline will result in exclusion from the competition. The EDP template is available for download on the ChemE Cube Competition Website: <a href="2025">2025</a> ChemE Cube Competition Powered by RAPID | ExxonMobil | AIChE
- On November 2nd: Onsite evaluation where teams must bring a printed EDP, printed EDP reviewer feedback and a printed Management of Change (MOC) Form



all in a folder or binder. Teams should be ready to answer questions from a compliance auditor during a live safety review of their product. Teams must pass both the online and onsite evaluations in order to compete.

### 4.1 Safety Audit: Online

An engineering documentation package (EDP) for your ChemE Cube must be completed and submitted by the posted deadline. A template is available here: <a href="https://www2.aiche.org/chemecube2025">https://www2.aiche.org/chemecube2025</a> A complete EDP will include the following:

**Section 1.0 Product description:** Please describe the cube, include a description of the process's capabilities and limitations. Justify your choices. This should be similar to your product pitch. Example: "A modular cube with an aluminum frame and removable Plexiglas panels housing a 12V DC supply fan and a chemical absorption column containing an amine to capture CO<sub>2</sub> from ambient air. Using an inlet flow of 5 L/min of ambient air, CO<sub>2</sub> capture will be verified with flow and concentration meters to show CO<sub>2</sub> capture for the full run of 10 minutes."

**Section 2.0 User Operating instructions:** Include a paragraph explaining how the cube operates, and if maintenance is required, waste disposal, etc. Be brief and limit technical jargon, this is for a potential future user, not for your use on competition day. Example: "To operate the cube, simply flip the switch on the side..."

**Section 3.0 Inlet air composition:** Document the composition of the inlet ambient air in respect to  $CO_2$  in ppm and if there would be any other constituents outside of the DAC challenge that would impact performance of the cube such as  $H_2S$ , CO, etc.

**Section 4.0 Outlet air composition:** Document the expected reduction in  $CO_2$  of the outlet air in respect to  $CO_2$  and any contaminants that the DAC capture approach taken may create in the process.

Section 5.0 Process Flow Diagram: Draw a PFD of your system.

**Section 5.0 Cube technical specification/performance sheet:** Contains the dimensions of the cube, all flow rates, throughput (capacity), power requirements (voltage, operating current), clearance, operational/environmental needs (e.g., light, temperature, RH), bill of materials, stacking considerations, etc. Include an isometric drawing of the cube, and document electrical power distribution throughout including connection points.



**Section 6.0 Photos:** Submit 6 pictures of your cube after construction has been completed. These pictures must be current. The entire cube must be visible in each picture. The pictures will be from the following points of view; side 1, side 2, side 3, side 4, top looking down, and top looking down with enclosure removed. Clearly identify inlet/outlet gas lines, power connections, and on/off switch (if applicable). A drawing or solid model (i.e., CAD model) is NOT acceptable.

**Section 7.0 Safety Assessment:** Describe the systems and technology in the cube, and document any hazards associated with cube operation.

**Section 8.0 Laboratory floor plan:** Please draw the floor plan for the laboratory where cube construction and testing took place. Include the location major fabrication tools, and list the location of the available safety equipment and spill response supplies on the diagram.

**Section 9.0 Cube Hazard Analysis:** Consider the DAC technique employed within the cube, and indicate whether a hazard is present. Some of the hazards include, but are not limited to, chemical, temperature, pressure, mechanical, and electrical, and dust/solid particles that arise from pouring solid material. Teams should document the safeguards they have incorporated relevant to each hazard present.

**Section 10.0 Fabrication Hazard Analysis:** In addition to the product hazards associated with the cube, there are also hazards present in the laboratory or fabrication site where prototype development and testing may occur. Teams should use the hazard identification form in the EDP template to identify any hazards associated with the lab or fabrication site, and document the control method used to safeguard against the hazard. When appropriate, students should document the PPE needed for each task. If uncertain, check with your team faculty advisor.

**Section 11.0 Chemical Information:** Include a description of the chemistry involved, and a list of any chemicals to be sent to the competition.

**Section 12.0 Treatment Chemical Hazards and Disposal:** List the properties for every chemical, typically found on the SDS. If a chemical is not flammable, please write N/A. Teams should attach a SDS for every chemical that will be used inside the cube to capture  $CO_2$ , if applicable, at the end of the EDP document.

**Section 13.0 Standard/Safe operating procedures page:** This section requires your team to conduct research related to hazards presented by your cube during start-up, operation, shutdown, cleanup / waste disposal, and in the event of



emergency shutdown. Please refer to the NIOSH website to search for and locate information on hazard mitigation. When not applicable, indicate with N/A.

**Section 14.0 Safety Rules:** This section is a summary of the competition's safety rules. They are provided here for the convenience of signing faculty.

**Section 15.0 Safety Certifications:** This page is used to document that students have completed the required safety training for the laboratory and fabrication tools (e.g., 3D printer, band saw, drill press, etc.). Each team member must sign and date, and the supervising faculty member must attest that they have read the safety rules, and that students have completed the training. They are also signing to acknowledge that the team has completed the EDP, and that the faculty advisor or outside expert has completed a safety review of the cube.

**Section 16.0 Management of Change Form:** After the online EDP review, if you make any changes to the product design or the EDP itself, you must complete the Management of Change (MOC) form included at the end of the EDP.

### 4.2 Safety Audit: Onsite.

At the competition site, an audit team will inspect each entry to ensure that all of the safety requirements have been met and there are no outstanding safety issues. The onsite audit team has the final say in regard to permission to compete, regardless of whether a design was previously cleared. During the safety audit, teams will be given the opportunity to attach their cube to all the connections.

## 5.0 Competition Safety Rules

- No transporting chemicals. Teams are not allowed to transport/ship chemicals by car
  to the competition site. No chemicals should be transported in private, university or
  rental vehicles to and from the competition site, even over short distances.
- 2. No chemical storage. Chemicals must not be stored in hotel rooms or other facilities not rated for chemical storage.
- 3. No unauthorized testing. No testing in hotel or dorm hallways, warehouses, or other facilities that are not designed for chemical handling. This includes at your university and the competition site.
- **4. Shipping Chemicals/hazardous materials**. Teams will be given a Chemical Order Form to order the required chemicals needed during the competition. Teams that created custom chemicals/material are only allowed to ship to a specific site by a deadline. Further information will be provided closer to the date of the competition.



- 5. Proper Testing. Testing of cubes must only be done in a laboratory or other facility with chemical handling capability. Testing in hotel or dorm hallways, warehouses, or other facilities that are not designed for chemical handling is not allowed. No mixing of chemicals, including common household chemicals is allowed in the hotel or in dorm hallways.
- 6. Illegal Disposal of Chemicals. All chemicals shipped to the competition site must be disposed of in a safe and correct fashion in compliance with all local, state and federal regulatory measures. Failure to follow these rules on chemical handling will result in a multi-year suspension of your university. Please minimize chemicals shipped to the competition site to reduce disposal costs.
- 7. Liquid/Solid Discharge. No other liquid/solid discharge, including water, is allowed. All other liquids should be properly contained within the cube, and properly disposed of (example, use of a holding tank). All interior components must be sealed so that there is no build up within the body of the cube. Cube components should be dry at the start of the competition, so that leaks can be observed.
- **8.** No release of gas under pressure. Only air may be vented from the cube and must not exceed 1 psig.
- **9. Autonomous Operation.** Cube must work autonomously. After startup, the cube may not be opened during the challenge DAC process. When the competition begins, students will only be permitted to input challenge ambient air by opening a valve/turning the unit on.
- **10.No Regulated Chemicals.** No chemicals regulated by OSHA will be allowed during the competition. A number of chemicals are listed by OSHA as a special hazard. The handling of these chemicals is outside the scope of the management systems available during the competition. See <a href="https://www.osha.gov">www.osha.gov</a> for details.
- 11.No Highly Reactive/Unstable Chemicals. No chemical, raw material, intermediate or product that is highly reactive or unstable will be permitted. This includes chemicals with a GHS hazard category level 1 ranking in any of the following categories; pyrophoric solids and liquids, acute toxicity, carcinogenicity, other toxicity hazards not specifically listed, and hazardous to the ozone layer. This also includes any chemical on the extremely hazardous substances list published by EPA.
- **12.No Liquid Hydrogen Peroxide Concentrations Greater than 30%.** Liquid hydrogen peroxide is very unstable and difficult to handle at concentrations greater than 30%.



- 13.Pressure Restrictions. Any equipment within the cube (tubing, etc.) operating above 1 psig should include a certification from the manufacturer that it can safely operate at that pressure. If gas is generated within the cube, indicate how it will be vented safely. If internal components operate above 1 psig, system design will have a certified pressure reducing valve to reduce exhaust gas to 1 psig or less (in agreement with requirement 8 above).
- **14.Biologics.** Biological materials after use will need to be inactivated with bleach.
- **15.Chemical Containment.** The primary containment must be adequate to prevent leakage of any chemicals during normal operation and transport of the cube.
  - **15.1.1. Lids**. All lids on containers containing chemicals must be securely attached to the container and should cover the entire container opening. Please ensure that any holes in the lid or container are just big enough to accommodate the "through hole item" seal if possible. Saran™ wrap, Parafilm™, aluminum foil and other similar materials are not adequate for use as container covers.
  - **15.1.2. Secondary Containment.** Secondary containment is required for chemicals with a GHS health or physical hazard of any ranking (1–4) and basic water solutions. The secondary containment must be of suitable durability and size to hold the contents of any spilled chemicals and prevent them from accumulating within the body of the cube.
- **16.Temperature Hazards.** All exterior surfaces of the cube must be less than 120°F. Insulation or barriers on internal components must be present to prevent accidental contact with hot or cold surfaces/components outside the range 32°F–90°F.
- 17.Electrical Hazards All wiring and exposed electrical components must be insulated or covered to prevent the possibility of electrical shock or ignition of any component of a cube. Alligator clips and twisted wires represent both an electrical shock hazard and an ignition source. Use more robust electrical connectors such as terminal connectors, banana plugs or binding posts.
- **18.Mechanical Hazards** Guards must be present for any moving parts and pinch points. This includes gears, belts, linkages, actuator arms and any other part that may present a pinch point.

#### 19. Accidents.

If a safety incident occurs during the competition, the AIChE student chapter advisor of



that team will be informed that an incident analysis report must be submitted to <a href="mailto:chemecube@aiche.org">chemecube@aiche.org</a>. This safety incident report must be approved by the ChemE Cube competition RAPID staff member before any team from that university is allowed to compete in any future competition.

### 20. Competition Day Rules

- **20.1.PPE**: Each team must provide the appropriate personal protective equipment (PPE) for use in the preparation "pit" area, as identified in their EDP and must use them properly. This includes lab coats, safety glasses, gloves, face shields, dust mask for handling materials that can produce aerosols, and hearing protection. The personal protective equipment must be used appropriately by all team members depending on the hazards encountered during the chemical preparation.
- **20.2.Labeling Containers.** All containers with chemicals, including bottles, beakers, syringes and plastic bags must be properly labeled. The label must minimally include the name of the chemical(s), and the name of the team. See Appendix B for more information on chemical labeling.
- **20.3.Spill Containment at Table.** All chemical pouring or mixing in the preparation area must be done with spill containment. The team must use a large tray compatible with the chemicals, with a volume large enough to hold the chemical quantities.
- **20.4.Chemical Distribution.** All chemicals will be made available to the teams in the chemical preparation area at least one (1) hour prior to the performance competition.
- **21.Requesting Assistance.** There is no restriction on requesting assistance for safety related matters. Teams are encouraged to request additional safety assistance from their faculty advisor, other faculty members, other universities, other teams, and professional practitioners in industry and elsewhere.



# **Appendix A. Chemical Handling and Disposal**

#### A.1 Introduction

All students who handle chemicals either at their host institution or at a regional or Annual competition must understand the hazardous properties of these chemicals. The following below are general rules for safety. Please follow your university lab rules and the rules of the chemical unit at the competition site. Before using a specific chemical, safe handling methods must always be reviewed. Faculty advisers are responsible for ensuring that the equipment needed to work safely with chemicals is provided.

### A.2 General Rules for Chemical Safety

- A. Safety Data Sheets (SDS) must be available in the laboratory for all chemicals, including those in storage in the laboratory.
- B. When purchasing chemicals, purchase the smallest quantity necessary to complete the planned experiments. The cost of disposal of unused chemicals far exceeds the savings from quantity purchases.
- C. Skin contact with chemicals must be generally avoided.
- D. No more than 2-gallons of flammable solvent should be out in the laboratory at any one time. Store bulk flammable containers in a flammable storage cabinet.
- E. All containers (including those in storage) must be labeled see the section on labeling below. Any unlabeled container must be treated as a hazardous substance.
- F. Wear compatible gloves and apron when handling strong acids and bases.
- G. Use a grounding strap and/or dip leg when transferring flammable chemicals into a storage tank.
- H. Transport <u>all</u> chemicals using a safety carrier. The chemical must be in a closed container.
- I. Chemical containers must be kept away from high temperatures, the edge of the lab bench, and other areas where an incident might lead to loss of containment.
- J. Mouth suction for pipetting or starting a siphon is not allowed.
- K. Unknown substances must be treated as toxic and flammable.
- L. Do not taste or smell any chemicals.
- M. Operations involving chemicals should generally be done in a laboratory hood.

## A.3 Chemical Storage

- A. SDS's must be available for all chemicals stored.
- B. ALL chemicals stored must be properly labelled.



- C. No chemicals shall be stored on the top of lab benches or out in the open. Chemicals must not be stored over eye level height to prevent accidents from dropping containers.
- D. Flammable and volatile chemicals must be stored in a cabinet designated for flammable storage. Refrigerated storage of these chemicals requires a refrigerator rated for storing flammables.
- E. Acids and bases should be stored separately.
- F. Acid-resistant trays shall be placed under stored acid containers.
- G. Acid-sensitive materials such as cyanides and sulfides must be separated from acids.
- H. Oxidizable materials should be stored away from acids and bases.
- I. Stored chemicals must be examined on a regular basis by the laboratory personnel (at least annually) to inspect for deterioration, container integrity, and expired dates. Chemicals which are not being used should be disposed of or returned to Chemical Stores for recycling.
- J. An inventory of stored chemicals must be always maintained by the laboratory owner. Leftover items shall be properly discarded or returned to Chemical Stores. Store only what you are using.

### A.4 Chemical Labeling

All chemicals must be labeled, even during temporary transport. This includes lab samples, temporary containers, etc. A proper chemical label must include:


- ► Name, address and telephone number
- Product Identifier
- Signal word
- Hazard statement(s)
- Precautionary statements
- Pictograms

Pictograms are required on labels to alert users of the chemical hazards to which they may be exposed. Each pictogram consists of a symbol on a white background framed within a red border and represents a distinct hazard. Here are examples of GHS pictograms you may encounter.






- Mutagenicity
- Reproductive Toxicity
- Respiratory Sensitizer
- Target Organ Toxicity
- Aspiration Toxicity



- Flammables
- Pyrophorics
- Self-Heating
- Emits Flammable Gas
- Self-Reactives
- Organic Peroxides



- Acute Toxicity (harmful)
- Narcotic Effects
- Respiratory Tract Irritant
- Hazardous to Ozone Layer (Non-Mandatory

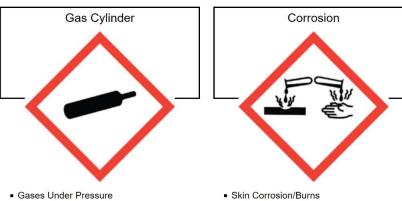


- Skin Corrosion/Burns
- Eye Damage
- Corrosive to Metals









# **A.5 Chemical Disposal**



All chemicals must be disposed of in a safe and environmentally friendly manner. Any chemical substance which is corrosive, flammable, reactive, toxic, radioactive, infectious, phytotoxic, mutagenic, or acutely hazardous must be treated as hazardous waste. Do not dispose of chemicals by evaporation in a fume hood or in the sink. Do not hesitate to ask if any questions occur about the hazards of a material.

Collect and store chemical waste in containers which are clearly labeled. Do not combine containers unless the contents in each container is known, is compatible, and it is certain that it is safe to do so. Combined wastes are much more difficult and costly to dispose of properly.

Ordinary waste such as paper, cardboard, etc., may be placed in the wastebasket. However, contaminated waste must be disposed of separately in a labeled container.

Empty chemical containers must also be disposed of in an acceptable fashion. They must first be cleaned and then either returned to Chemical Stores or disposed through normal trash.